PARTIAL B NDARY SURVEYS

ROBERT S. KER LOCK & DAM 15

ARKANSAS RIVER, OKLAHOMA

Performed Under Contract No. DACW 56-68-C-0105

SEC. 24 T- 11 -N R- 23 -E COUNTY SEQUOYAH

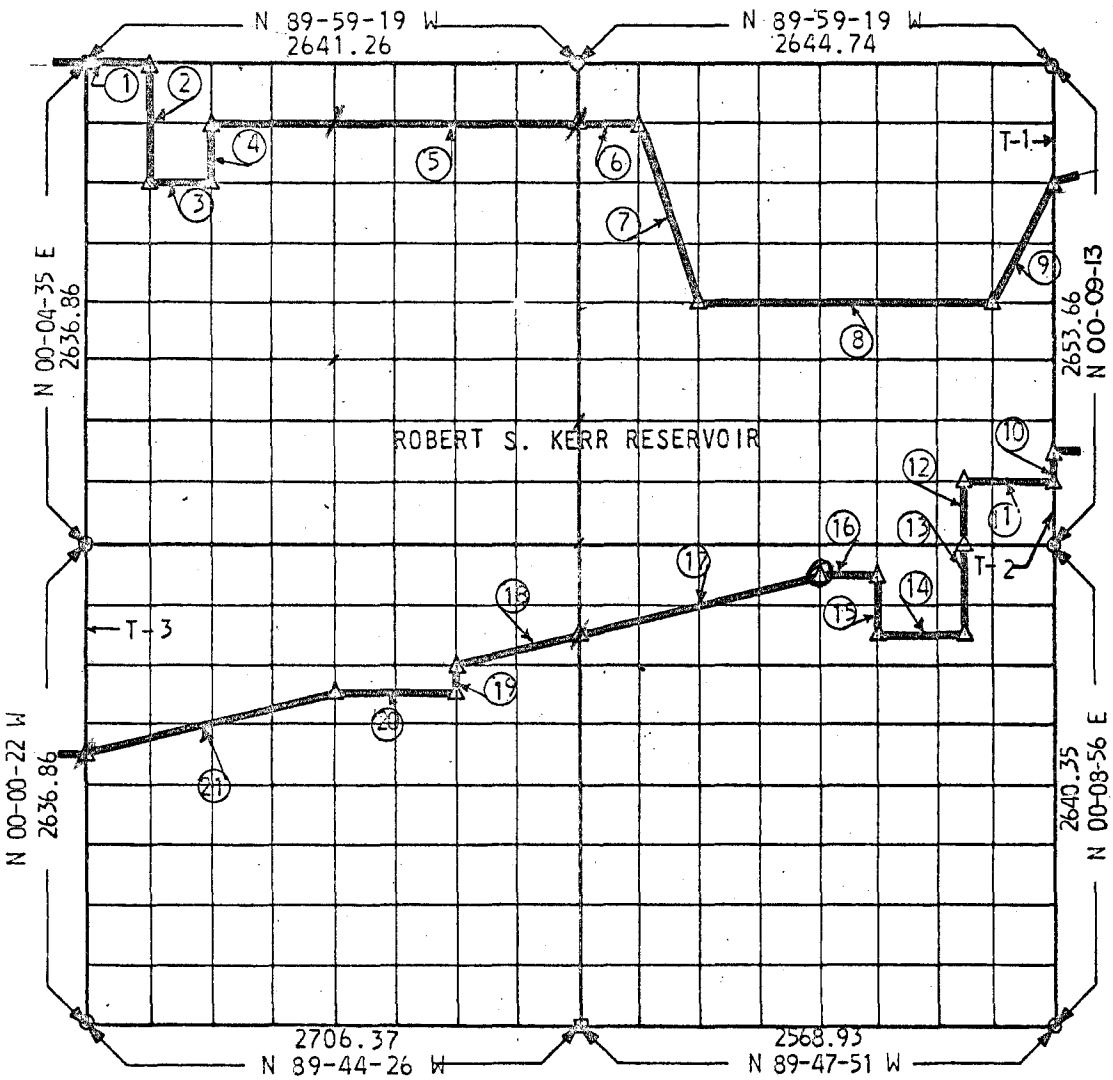

Course No.	Distance	Bearing	Course No.	Distance	Bearing
1	330.16	S 89-59-19 E	14	437.43	N 89-48-16 W
2	659.48	S 00-01-02 E	15	330.03	N 00-09-39 W
3	331.23	S 89-56-33 E	16	325.54	N 89-48-20 W
4	329.87	N 00-06-39 W	17	1338.51	S 75-55-16 W
5	1984.18	S 89-57-56 E	18	688.38	S 76-20-32 W
6	329.99	S 89-57-58 E	19	164.96	S 00-30-17 E
7	1048.94	S 18-48-00 E	20	671.33	N 89-47-10 W
8	1641.07	S 89-53-53 E	21	1381.29	S 76-24-33 W
9	740.43	N 26-28-00 E			
10	165.85	N 00-09-13 E	T-1	663.42	
11	439.65	N 89-49-46 W	T-2	331.71	
12	331.01	S 00-00-02 E	T-3	1153.63	
13	495.56	S 00-00-18 E			

Field Book No. A-2812 Date 5-28-68

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 24, T 11 N, R 23 E, SEQUOYAH COUNTY, OKLAHOMA.

PHELPS, SPITZ, AMMERMAN & THOMAS INC.

Under the Supervision of

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

LEGEND

△ MONUMENT
□ ORIGINAL CORNER
○ IRON PIN