SEC. 21, T-12-N, R-21-E, SEQUOYAH COUNTY, OKLAHOMA

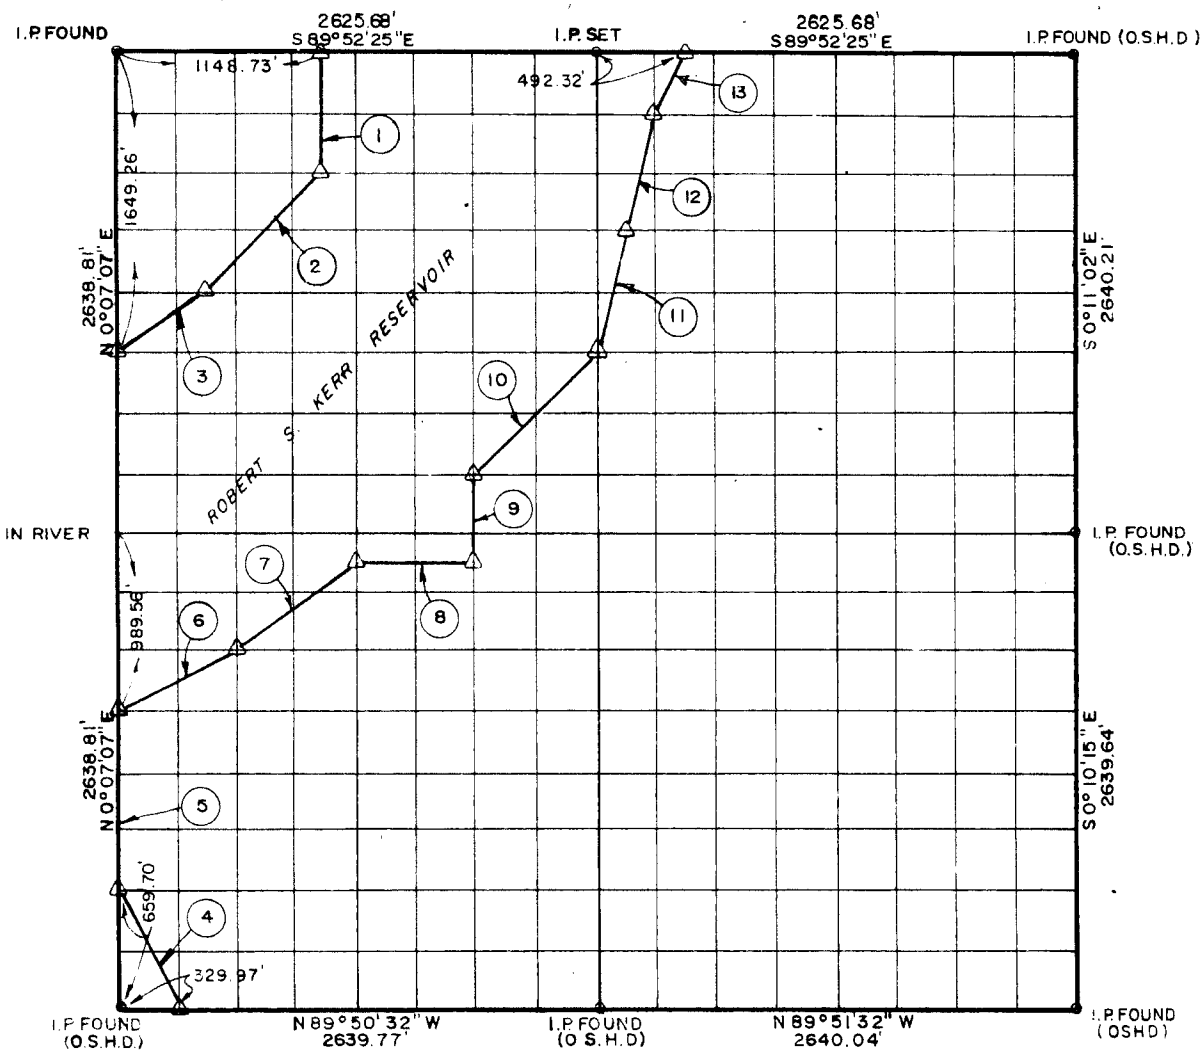


Date Surveyed JUNE 1968 Book No. A-2877 Scale: 1:10,000

| COURSE NO. | DISTANCE | BEARING | COURSE NO. | DISTANCE | BEARING |
|---|---|---|---|---|---|
| 1 | 659.78' | S 0°03'16"W | 13 | 368.30' | N 26°30'26"E |
| 2 | 930.67' | S44°59'11"W | | | |
| 3 | 593.07' | S56°20'31"W | | | |
| 4 | 737.82' | N26°26'48"W | | | |
| 5 | 989.55' | N 0°07'07"E | | | |
| 6 | 736.46' | N63°32'14"E | | | |
| 7 | 823.11' | N53°11'24"E | | | |
| 8 | 658.29' | S89°51'29"E | | | |
| 9 | 494.88' | N 0°00'31"E | | | |
| 10 | 930.49' | N44°58'21"E | | | |
| 11 | 679.56' | N13°57'08"E | | | |
| 12 | 679.56' | N13°57'08"E | | | |

# PARTIAL BOUNDARY SURVEYS, ROBERT S. KERR LOCK & DAM 15, ARKANSAS RIVER OKLAHOMA

BY

## CRAIG AND KEITHLINE

CONSULTING ENGINEERS

FOR

## DEPARTMENT OF THE ARMY, CORPS OF ENGINEERS, TULSA DISTRICT, UNDER CONTRACT NO. DACW 56-68-C-0242

I, Charles R. Keithline, a Registered Professional Engineer in the State of Oklahoma do hereby certify that the above plat is a true and accurate survey of Section 21, T-12-N, R-21-E, as made under my supervision.

Charles R. Keithline

CHARLES R. KEITHLINE, Reg. No. 2834 (Okla.)

LEGEND

△ Std. C. of E. Conc. Monument

○ Iron Pin

□ Original Stone