PARTIAL BOUND Y SURVEYS
ROBERT S. KERR LOCK & DAM 15
ARKANSAS RIVER, OKLAHOMA

Performed Under Contract Number DA-34-066-Civeng-66-225

SEC. 27 T-11-N R-23-E COUNTY SEQUOYAH

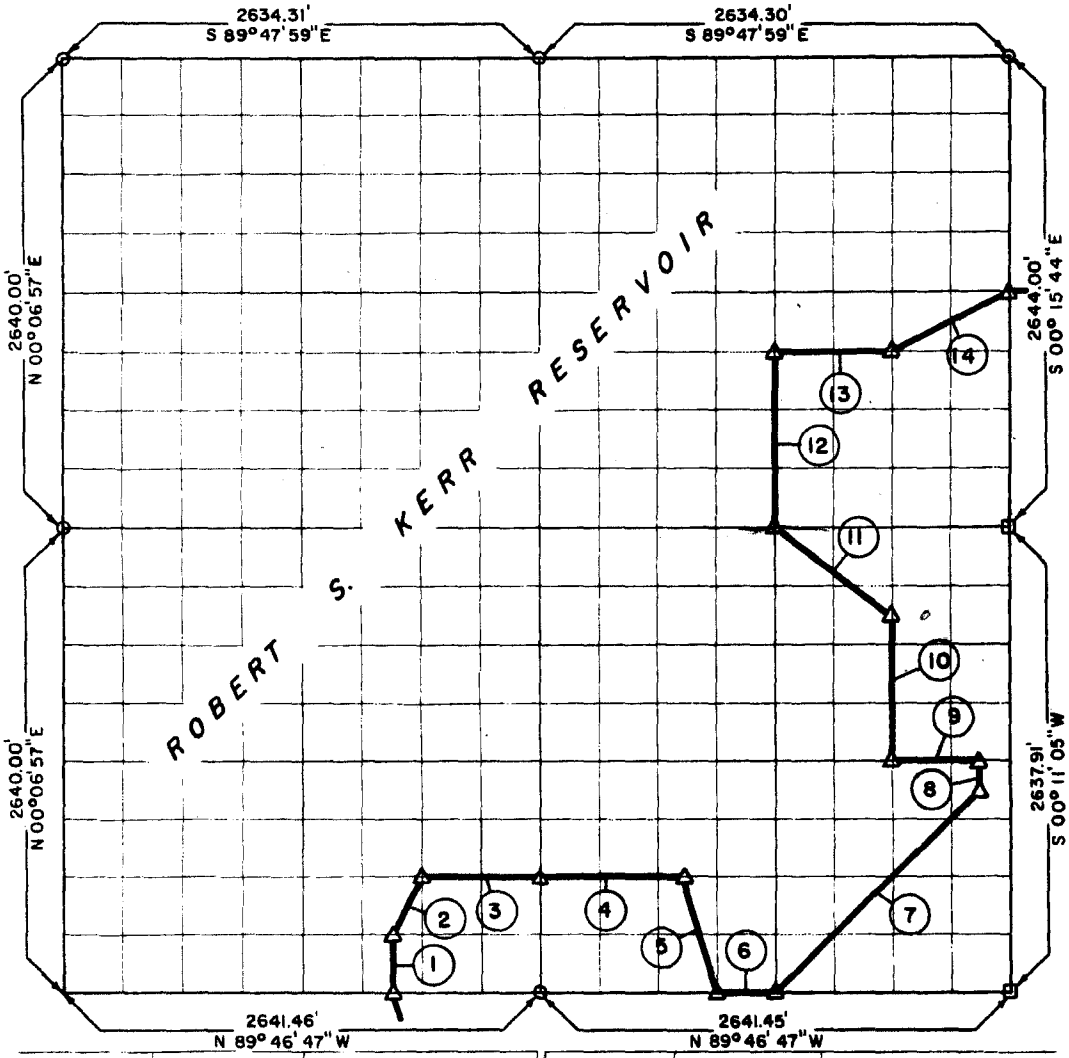

Course No.	Distance	Bearing	Course No.	Distance	Bearing
1	329.91	N 00° 03' 45" E	14	736.27	N 63° 33' 20" E
2	368.47	N 26° 40' 17" E			
3	660.14	S 89° 46' 28" E			
4	825.98	S 89° 46' 26" E			
5	680.38	S 13° 57' 30" E			
6	330.18	S 89° 46' 47" E			
7	1632.61	N 45° 14' 09" E			
8	164.87	N 00° 10' 32" E			
9	495.91	N 89° 46' 06" W			
10	824.43	N 00° 08' 53" E			
11	827.09	N 53° 01' 32" W			
12	991.11	N 00° 06' 43" W			
13	660.75	S 89° 46' 23" E		9,528.10	

Field Book No. A-2389, Date 2-8-66

K. N. COX & ASSOCIATES - ENGINEERS

Under the Supervision of

U.S. ARMY ENGINEER DISTRICT, TULSA
CORPS OF ENGINEERS

SHEET 1 of 1

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 27, T-11-N, R-23-E, SEQUOYAH COUNTY, OKLAHOMA

K. N. Cox

REGISTERED PROFESSIONAL ENGINEER

LEGEND

△ MONUMENT
□ ORIGINAL CORNER
○ IRON PIN